





04 - 05

Vision - mission, message of CEO

06 - 07

Introduction to Dulico

08 - 14

Brass strips

15 - 18

Commercial products

19 - 23

Mechanical products

24 - 25

Quality Management & Production Process





ABOUT DULICO

Company name: MANUFACTURING & TRADING DULICO **COMPANY LIMITED**

Founded: 1991

Representative: Mr. Nguyen Trong Duy Factory investment: 10.000.000 USD Company capital: 2.100.000 USD Employee: 120 people (May 2024)

Area: 24.000 m²

WHAT WE DO?

- Casting and rolling of the brass strip, plate and rods.
- Trading other types of brass strips.
- Producing stamping parts OEM & ODM on various metals.
- Producing lock parts: core, body, lock, key, cover, hinge, etc.
- Machining products with CNC lathe technology.





Headquarter & Factory 1: Lot A2, CN7, Tu Liem Industrial Cluster, Xuan Phuong Ward, Hanoi, Vietnam

⊕ www.dulico.vn ⊠ info@dulico.vn

划 02437805037



Industrial Park, Quang Minh Commune, Hanoi, Vietnam

WHY DULICO?

CERTIFICATES & ACHIEVEMENTS







EXPORT

Currently, Dulico brand brass strips products have been exported to Canada, Japan and many other countries in the world.



Top 10 key industrial products of Hanoi City 2023

Affiliated Organizations & Associations































COPPER & COPPER ALLOY


COPPER & COPPER ALLOY







PRODUCTION PROCESS

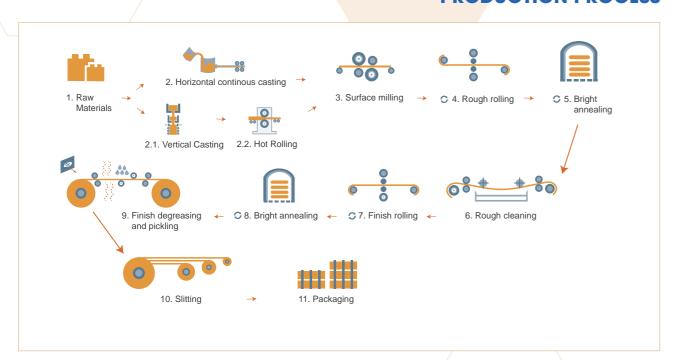



Brass strips have common properties of good electrical and thermal conductivity, ductility, and high durability. Dulico's brass strip is also produced through a strict quality control process. This ensures that the product always has straightness, accurate thickness tolerance, uniform hardness, and clean, bright surface quality.

APPLICATIONS

- Household electricity
- Automobiles
- Electronics
- Construction materials
- Industrial electricity

QUALITY CERTIFICATE

Dulico's brass strips products meet the international copper standard C2801, C2680 component testing standards and ROHS cleanliness standards.













Alloy Grade Cross-Reference Table

Japan	USA		UK / EU	Germany	China	
JIS	ASTM	CDA	EN	DIN	Werkstoff Number	GB
C2400	C24000	CDA240	CW503L	CuZn20	2.0240	H80
C2600	C26000	CDA260	CW505L	CuZn30	2.0265	H70
C2680	C26800	CDA268	CW506L	CuZn33	2.0280	H68
C2720	C27200	CDA272	CW508L	CuZn37	2.0321	H63
C2801	C28000	CDA280	CW509L	CuZn40	2.0360	H62/H59



Chemical Composition

Alloy Grade Chemical C			position			Dimensional Specifications		
JIS	DIN	Copper (%)	Zinc (%)	Lead (%)	Iron (%)	Impurities	Thickness	Width
C2400	CuZn20	79.0–81.0	Remain	≤0.03	≤0.05	≤0.3		6 – 450 mm (0,236–17,717 in)
C2600	CuZn30	68.5–71.5	Remain	≤0.03	≤0,05	<0,3	0.2-10 mm (0,0079–0,3937 in)	
C2680	CuZn33	63.5–65.0	Remain	≤0.03	≤0,05	<0,3		
C2720	CuZn37	62.0-65.0	Remain	≤0.05	≤0.07	≤0.3		
C2801	CuZn40	59.0-62.0	Remain	≤0.1	≤0,05	<0,3		

Physical & Mechanical Properties

JIS	DIN	Temper	Vickers Hardness (HV)	Elongation (%)	Tensile Strength (MPa)	Bending Angle
		0	_	≥44	≥255	180°
C2400	CuZn20	1/4H	_	≥30	295–375	180°
02400	GuZiizo	1/2H	_	≥25	325–400	180°
		н	_	_	≥375	180°
		0	_	≥35	≥275	180°
		1/4H	75–125	≥30	325–420	180°
		1/2H	85–145	≥23	355–450	180° or W
C2600	CuZn30	3/4H	95–160	≥10	375–490	180° or W
		Н	105–175	_	410–540	180° or W
		EH	145–195	_	520–620	_
		SH	165–215	_	570–670	_
		0	_	≥35	≥275	180°
		1/4H	75–125	≥30	325–410	180°
		1/2H	85–145	≥28	355–440	180° or W
C2690	CuZn22	3/4H	95–165	≥10	375–490	180° or W
C2080	C2680 CuZn33	Н	105–175	_	410–540	180° or W
		ЕН	145–195	_	520-620	_
		SH	165–215	_	570–670	_
		ESH	≥180	_	≥620	_
		0	_	≥40	≥275	180°
C2720	C.,7,2,7	1/4H	75–125	≥35	325–410	180°
C2720	CuZn37	1/2H	85–145	≥28	355–440	180°
		Н	≥130	_	≥470	90°
		0	_	≥35	≥325	180°
C2901	Cu7n40	1/4H	85–145	≥35	355–440	180°
C2801	CuZn40	1/2H	105–160	≥15	410–490	180°
		Н	≥130	_	≥470	90°







Copper strip or copper leaf is copper containing at least 99.90% copper.

PROPERTIES

Copper strip is easy to process, weld, plate and has high anti-corrosion. In addition to outstanding properties such as high stability, excellent electrical conductivity, Dulico's copper products are also produced through a strict quality control process to ensure the indexes of thickness, uniform hardness, smooth surface, flat copper strip, no warping or sagging.

APPLICATIONS

Copper strip is widely used in many different industries, especially in the electrical and electronics industry.

Standards of DULICO's Copper strips

Alloy Grade				Chemical Composition				Dimensional Specifications		
JIS	ASTM	EN	DIN	GB	Cu (%)	Oxy (%)	Zn/Pb/Fe	Impurities	Thickness	Width
C1020	C10200	CW008A	OF-Cu	TU1	≥99.96	≤0.001	≤0.01	_		6 – 450 mm (0,236–17,717 in)
C1100	C11000	CW004A	E-Cu	T2	≥99.90	≤0.04	≤0.05	-	0.2-10 mm (0,0079–0,3937 in)	
C1220	C12200	CW024A	SF-Cu	TP2	≥99.90	0.02-0.04	≤0.05	_		,

Physical & Mechanical Properties

JIS	DIN	Temper	Vickers Hardness (HV)	Elongation (%)	Tensile Strength (MPa)	Bending Angle
		0	_	≥20	≥195	180°
C1020 OF-Cu	1/4H	55–100	≥15	215–285	180°	
	1/2H	75–120	≥10	235–315	180°	
		Н	≥80	_	≥275	90°
	0	-	≥20	≥195	180°	
C1100	E-Cu	1/4H	55–100	≥15	215–285	180°
CTIOO	E-Cu	1/2H	75–120	≥10	235–315	180°
		Н	≥80	_	≥275	90°
		0	_	≥20	≥195	180°
C4220	SF-Cu	1/4H	55–100	≥15	215–285	180°
C1220	Sr-Cu	1/2H	75–120	≥10	235–315	180°
		Н	≥80	-	≥275	180°



QUALITY MANAGEMENT The goal of the quality control process at DULICO is to ensure that no defective products reach the customers. We comply with ISO 9001 standards for quality management, from the assessment and screening of input materials to the production stages. Copper in the furnace is analyzed by German Spectro spectrometer; thickness tolerance is checked by modern AGC thickness gauge; hardness is measured by Japanese HV analyzer; copper surface and color fastness are strictly controlled by roughness analyzer and salt spray equipment. **Quality management equipment DULICO**

COMMERCIALS PRODUCTS




TIN PHOSPHOR BRONZE STRIP



LEAD FRAME STRIP



NICKEL SILVER BRONZE STRIP

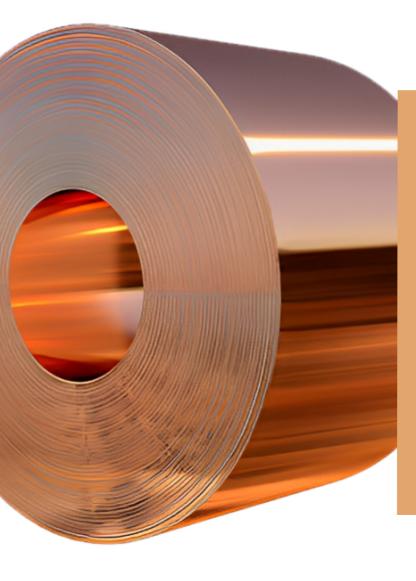

TIN PHOSPHOR BRONZE STRIP

PROPERTIES

APPLICATIONS



Standards of Tin phosphor bronze strip

Alley ende	Chemical co	omposition	(%)					Hardness (H)	Size		
Alloy code	Cu	Sn	Fe	Ni	Р	Zn	Remain	Hardness (H)	Length	Width	
C5191	93.5	6.5	-	-	0.03 - 0.35	-	Cu+Sn+P≥99.5	H/4;H/2;H		20-600mm (0.7874 – 23.6220 in)	
C5210	92	8	-	-	0.03 - 0.35	-	Cu+Sn+P≥99.5	H/4;H/2;H			
C5071	98	2	-	-	≤0.15	-	Cu+Sn+P≥99.5	H/4;H/2;H	0.10-3.00mm		
C5111	95.1 - 96.5	3.5 - 4.9	-	-	0.03 - 0.35	-	Cu+Sn+P≥99.5	H/4;H/2;H	(0.0039 – 0.1181 in)		
C41120	91	0.8	0.15	-	-	Remain	Zn	H/2;3/4H			
C44500	72-75	0.5-1.2	-	-	-	Remain	Zn	1/2H;3/4H;H;EH;SH			



Standards of Nickel silver bronze strip

operation of communication systems.

often used to form conductive shields around circuit boards, chips and antennas, preventing interference from external sources and ensuring the correct

Alloy code	Chemical co	Chemical composition (%)							Size	
	Cu	Pb	Fe	Zn	Ni+Co	Mn	Remain	Hardness (H)	Length	Width
C7701	54.0 - 58.0	≤0.03	≤0.25	Remain	16.5 - 19.5	≤0.50	Cu+Sn+P ≥99.5	O;H/4;H/2;H;EH;SH	0.15-3.00mm	(0.7874 –
C7521	62.0 - 66.0	≤0.03	≤0.25	Remain	16.5 - 19.5	≤0.50	Cu+Sn+P ≥99.5	O;H/4;H/2;H;EH;SH	(0.0059 –	
C7351	70.0 - 75.0	≤0.03	≤0.25	Remain	16.5 - 19.5	≤0.50	-	O;H/4;H/2;H;EH;SH	0.1181 in)	15.7480 in)

COPPER & COPPER ALLOY





LEAD FRAME STRIP

BASIC PROPERTIES


Copper Lead Frames is a copper alloy with many outstanding advantages in terms of electrical conductivity, mechanical strength, machinability, corrosion resistance and thermal stability.


APPLICATIONS

Copper lead frames are widely used in the electronics and electrical industries, especially in the production of lead frames and integrated circuit components.









Standards of Lead frame strip

Alloy code	Chemical compo	Chemical composition (%)								
	Pb	Fe	Sn	Zn	Р	Cu	Hardness (H)			
C1921	-	0.05-0.15	-	-	0.015-0.050	Remain	O; H/2; H			
C1940	≤ 0.03	2.1-2.6	-	0.05-0.20	0.015-0.150	Remain	O; H/2; H; EH; SH			



MECHANICAL PROCESSING

MACHINERY & EQUIPMENT

QUALITY

Stamping

Stamping machine from 10 – 260 T - Taiwan/Japan	30
Stamping machine 60 T with automatic feeder - Komatsu - Japan	1
Stamping machine 80 T with automatic feeder - Komatsu - Japan	3
Stamping machine 260 T with automatic feeder - Chinfong - Taiwan	1

CNC

CNC Lathering - Taiwan/China

Surface Treatment

Mechanical lathe - Japan

Sanding and Felt Polishing Machine		10
Automatic Hinge Polishing Machine	The same of	2
Mater Abrasiya Surface Treatment Machine	THE RESERVE	1

Mold & Die Machining Equipment


Mechanical milling machine - Japan	
Wire EDM Machine - Japan	-
3-Axis automatic surface grinding machine - Japan	
Wire cutting machine - China	
CNC Milling Machine - China	
CNC Start-hole drilling machine - China	

QC inspection

Caliper - Mitutoyo - Japan	
Panme - Mitutoyo - Japan	
2D measuring machine - Taiwan	
Salt spray machine - China	

STAMPING

With the proactive source of brass strips materials, Dulico has a huge advantage in the stamping and punching of copper parts. In addition, Dulico also stamps on different materials, based on the drawings and requirements of customers.

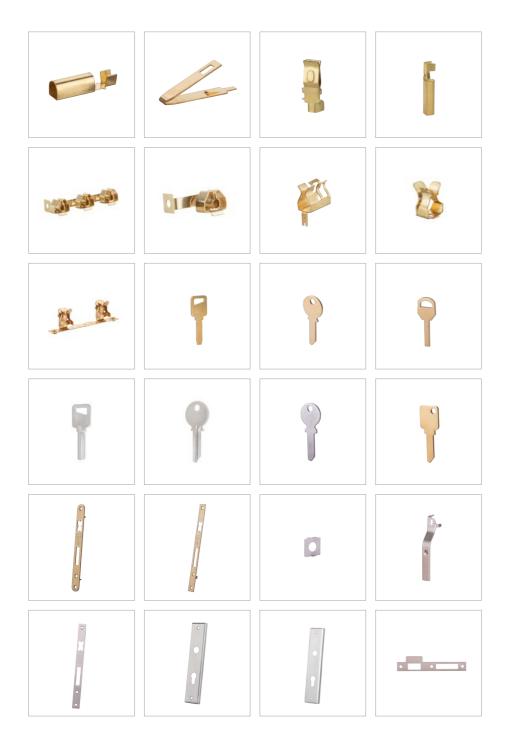



IMAGES MACHINERY & FACTORY











COPPER & COPPER ALLOY





20

COPPER & BRASS FITTINGS

From the source of copper material cast at the factory, Dulico directly processes CNC lathes at competitive costs. Dulico's copper parts have conquered customers in the Japanese market.

































HINGE

Dulico specializes in manufacturing door hinges made of steel, stainless steel, and copper. As a long-term partner of famous lock and door brands in Vietnam, we produce a variety of different hinges.















COPPER & COPPER ALLOY





















22


23

QUALITY MANAGEMENT

The goal of the quality control process is to ensure that no defective products reach the customer. Dulico complies with ISO 9001 standards for quality management. Input materials from suppliers are carefully evaluated and screened. Dulico strictly

controls all stages of the production process and controls the final product.















PRODUCTION AND ORDERING PROCESS



Get drawings & sample products

Delivery





Building

production process

















Mass production









Trial production





Thank you for your interest and trust in Dulico.

We hope to have the opportunity to cooperate with you in the future.







MANUFACTURING & TRADING DULICO COMPANY LIMITED

Headquarter & Factory 1: Lot A2, CN7, Tu Liem Industrial Cluster, Xuan Phuong, Hanoi, Vietnam Factory 2: Lot 37, Quang Minh Industrial Park, Quang Minh Commune, Hanoi, Vietnam

⊕ www.dulico.vn ☑ info@dulico.vn ⓒ 02437805037

